

High-Power Converter Based on the WideBand Gap Power Semiconductor Devices for Electrical Drive

C.Harinatha Reddy¹, Y.V. Siva Reddy², Chalasani Hari Krishna³, A. Pradeep Kumar Yadav⁴, T. Brahmanada Reddy⁵, N. Ravi Sankara Reddy⁶

¹Associate Professor in EEE Dept of G.Pulla Reddy Engineering College(Autonomous), Kurnool,

²Professor in EEE Dept of G.Pulla Reddy Engineering College(Autonomous), Kurnool.

³Associate Professor in EEE Dept, Mother Teresa Institute of Science and Technology, Khammam,

⁴Assistant Professor in EEE Dept, G.Pulla Reddy Engineering College(Autonomous), Kurnool,

⁵Professor in EEE Dept, G.Pulla Reddy Engineering College(Autonomous), Kurnool

⁶Associate Professor in EEE Dept of G.Pulla Reddy Engineering College(Autonomous), Kurnool,

¹harinath.eee@gprec.ac.in, ²yvsreddy.eee@gprec.ac, ³chalasaniharikrishna@gmail.com, ⁴pradeep.eee@gprec.ac.in, ⁵bramha.eee@gprec.ac.in, ⁶ravishankar.eee@gprec.ac.in

Abstract—appropriate toward the objects restrictions, the conventional si- support control strategy move toward the fundamental restrictions of the matter within lots of behavior. The si- support procedure contain not be appropriate toward elevated electrical energy, elevated freq, elevated heat, elevated effectiveness plus elevated control compactness functions. appropriate toward the broad group space circuitry procedure encompass supreme electrical presentation of the si- support procedure, it be able to considerably decrease the burden of the inverter, amount, charge, plus augment effectiveness plus supremacy concentration influence electronic procedure, which be able to resist superior charge, earlier change rate, lesser button sufferers plus superior working connection warmth. The topic of elevated effectiveness, elevated supremacy compactness within the railing transfer electrical make insist since the conditions, the input expertise study of elevated influence converter support lying on the extensive group breach supremacy circuitry strategy be projected primary, the topological arrangement of supremacy electronic grip transformer be specified. next, the scheme organize policy counting spill H-bridge solo- stage rectifier, double lively H-bridge converter manage, inverter grip glide vector organize, plus support converter productivity electrical energy manage be agreed. associated investigate resolve offer a hard base within the growth of extensive group fissure supremacy plans plus the elevated electrical energy huge capability tool functions.

Keywords—railing consignment electrical constrain; extensive group fissure; circuitry machinery; elevated supremacy motor

1.Introduction

measure up to by conservative si support supremacy circuitry procedure, the original extensive group fissure supremacy partially conductor diplomacy contain individuality of extensive group fissure, elevated serious EF power, elevated diffusion velocity, plus elevated diffusivity, which be able to arrive at superior endure electrical energy standards plus earlier button velocity, inferior change thrashing, and [1-6]advanced working connection warmth than si campaign subsequently, the extensive group fissure supremacy circuitry device can significantly reduce the load, capacity, plus rate of the supremacy electronic converter, advance the effectiveness with supremacy concentration

of the supremacy electronic machine~10^a

&advance the presentation of the supremacy electronic scheme. How in the direction of diminish the load plus quantity of quick prepare grip scheme be individual of the input equipment inside speedy prepare machinery of railing transportation electrical make, plus the solution toward limit the velocity of speedy prepare additional. by the growth of elevated supremacy electronic equipment, multi stage topology plus power equipment, [11-14] supremacy electronic Transation contain conventional additional plus extra concentration. suitable toward the greater individuality of extensive group fissure

supremacy equipment, request determination seriously get better the routine of railing transfer supremacy broadcast motors inside conditions of quantity, burden, plus effectiveness. commencing a capability viewpoint, the newly start on SiC Metal Oxide Semiconductor Field Effect Transistor machine be able to get together the insist intended for RPS inside supplementary motors intended for the railing shipment electrical make. The fast growth of the machine be likely toward be functional inside the major grip force scheme intended for the railing shipment inside the expectations.

The study intends the topology plus manage plan of elevated control support plus grip motors found on top of the extensive group fissure supremacy circuitry equipment future intended for block consignment electrical build since a consequence distinguish the effectiveness advantage lighting load of the quick direct clench create system, which be cooperative to the growth of the seize create system to important speed advantage important superiority. intellectual learning, arithmetical imitation, bonus examination result be accessible to show the power of the designed procedure.

2. Proposed Work :

LAYOUT OF MOTOR TOPOLOGY:

PETT exist a unique seize restrain scheme, which be able to decrease the power expenditure plus load via return the usual grip motor of great quantity, important heaviness, plus short effectiveness. on there, the extensively employ PETT topology have a solo stage CHB engine plus DAB motors by average or elevated freq engines. The grip motor component give supremacy intended for the inverter grip motor. A 3-stage AC power resource by modifiable electrical energy amplitude, freq, plus stage be able to be full to 4 similar linked grip motors support on top of a grip inverter. The supplementary motor component give power intended for supplementary tools such since the prepare supporter plus the illumination light. by stage DC electrical energy, 4 flow H-bridge component inside sequence be

desirable on slightest via 1.7kV IGBTs otherwise Sic MOSFET machine intended for supplementary motors component.

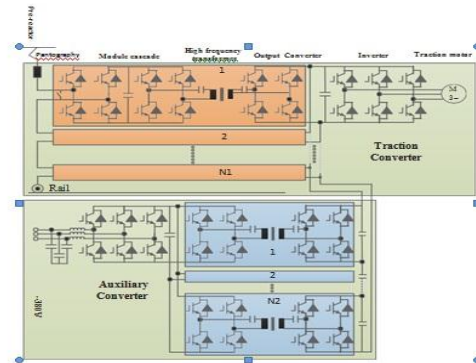


Fig. 1. the topological structure of PETT

I. approaching methodology

A. CH-bridge Solo-stage Rectifier

The Fig.2. U_s , U_{d1} , U_{d2} , ..., U_{dN} are used for dc bus voltage of all CH-bridge U_{dc} is the sum of CHB dc motor vehicle voltage, i_s is position of network effort I, U_{dc}^* position of dc motor vehicle electrical energy, U_{ad} rectifier IP electrical energy. The manage plan comprise electrical energy external round, I internal circle plus C electrical energy adaptive power. The interruption of network voltage be able to be remove during the electrical energy supply advance return.

B. DA H-bridge motor power

The supremacy equilibrium be in charge of plan intended for all unit plus double stage transfer PWM be accept which be able to attain the V, I plus supremacy allocation manage of all component. via minimizing the DAH-bridge scheme stricture, such since the feature impedance, the relation of button freq plus ringing freq plus electrical energy change proportion, the backflow supremacy of motor be condensed considerably more than a extensive weight collection.


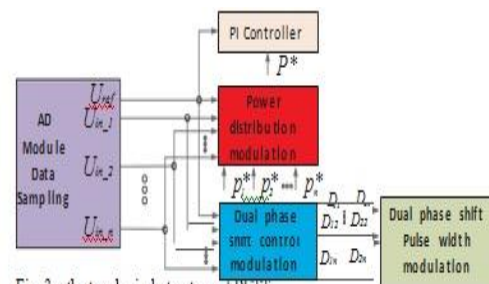


Fig. 3. the topological structure of PETT

The Fig.4 comprise the instability plan component by the effectiveness minimization, the d-axis electrical energy supply frontward, the q- axis electrical energy supply frontward, rotor instability viewer unit plus PWM.

The direct plan of secondary motor productivity, which accept the inductor I response plus V/I supply frontward power. It is attain the immediate path of productivity plus the attainable active path of V_{output} below abrupt weight plus abrupt weight circumstances.



A. CH-bridge Solo-stage Rectifier

The scheme exercise 6.5kV IGBTs, group of CH-bridge N1 =12, & the freq is 4 kHz via the yielding button expertise. as of the reproduction consequences, PF=1 process & DC motor vehicle electrical energy manage be attained.








Fig.10 imitation WF of main twisting electrical energy plus I which have attain the yielding button ringing manage



As of the replication consequences, the congested ring way result of the grip motor current is superior.



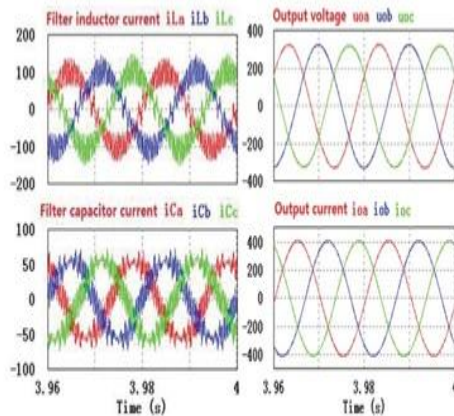


Fig.12 the simulation waveform of exciting current i_d , torque current i_q , traction motor speed ω_m , three phase current i_{as} i_{bs} i_{cs}

Test The CAS300M17BM2 which the speed electrical energy 1200V & 300A. The elevated freq motor accept nano crystalline mixture which the motor revolve 1:1, the pour out inductance is 15 μ H. The button freq 43 kHz plus the DC op electrical energy 500V.



Fig. 13, the prototype of dual active H-bridge

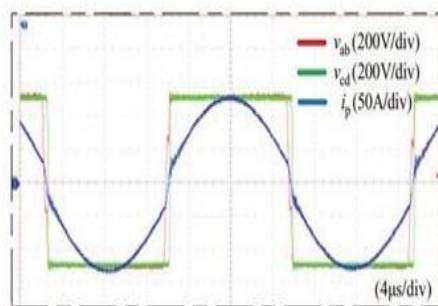


Fig. 14, the experimental waveform of primary winding voltage and current of the high frequency transformer

II. Conclusion

The PF=1 process plus the DC motor vehicle electrical energy organize of flow H-bridge solo-stage rectifier, the flexible button ringing manage of double vigorous H-bridge motor manage, motor grip speed vector manage plus supplementary motor productivity electrical energy organize be attained.

References:

- [1] McNutt T, Hefner A, Mantooth H, et al. Silicon carbide power MOSFET model and parameter extraction sequence[J]. IEEE Transactions on Power Electronics, 2007, 22(2): 353-363.
- [2] Kadavelugu A, Baliga V, Bhattacharya S, et al. Zero-voltage switching performance of 1 200V SiC MOSFET, 1200V silicon IGBT and 900V CoolMOS MOSFET[C]. 2011 IEEE Energy Conversion Congress and Exposition, 2011: 1819-1826.
- [3] Zhao B, Song Q, Liu W. Experimental comparison of isolated bidirectional DC-DC converters based on all-Si and -SiC power devices for next-generation power conversion application [J]. IEEE Transactions on Industrial Electronics, 2014, 61(3): 1389-1393.
- [4] B Zhao, Q Song, W Liu, Y Sun. Characterization and application of next-generation SiC power devices for high-frequency isolated bidirectional DC-DC converter[C]. in Proc. 38th Industrial Electronics Society Conference, 2012: 280-285.
- [5] Arun Kadavelugu, Seunghun Baek, Sumit Dutta. High-frequency design considerations of dual active bridge 1 200V SiC MOSFET DC-DC converter[C]. In Proc. 26th IEEE the Applied Power Electronics Conference & Exposition, 2011: 314-320.
- [6] Y Wang, S W H Haan, J A Ferreira. Potential of improving PWM converter power density with advanced components[C]. In Proceedings of 13th European Conference on Power Electronics and Applications, 2009: 1-10.
- [7] Potbhare S, Goldsman N, Lelis A, et al. A physical model of high temperature 4H-SiC MOSFETs[J]. IEEE Transactions on Electron Devices, 2008, 55(8): 2029-2040.
- [8] Berning D W, Duong T H, Ortiz-Rodriguez J M, et al. High-voltage isolated gate drive circuit for 10kV, 100ASiC MOSFET/JBS power modules[C]. Industry Applications Society Annual Meeting

Edmonton, Canada:IEEE,2008:1-7.

- [9] Rabkowski J, Tolstoy G, Pefitsis D, et al. Low-loss high-performance base-drive unit for SiC BJTs[J]. IEEE Transactions on Power Electronics ,2012,27(5):2633-2643.
- [10] Wang J, Zhao T, Li J, et al. Characterization,modeling and application of 10 kV SiC MOSFET[J]. IEEE Transaction on Electron Devices,2008, 55(8):1798-1805.
- [11] Thomas Besselmann, Akos Mester, Drazen Dujic. Power electronic traction transformer: efficiency improvements under light-load conditions[J]. IEEE Transaction on Power Electronics,2014, 29(8):3971-3981.
- [12] Jianqiang Liu, Jingxi Yang, Jiepin Zhang, et al. Voltage balance control based on dual active bridge DC/DC converters in a power electronic traction transformer [J]. IEEE Transaction on Power Electronics,2018, 33(2):1696-1714.
- [13] Jianqiang Liu, Nan Zhao. Improved fault-tolerant method and control strategy based on reverse charging for the power electronic traction transformer[J]. IEEE Transaction on Industrial Electronics, 2018, 65(3):2672-2682.
- [14] Chuanhong Zhao, Drazen Dujic, Akos Mester, et al. Power electronic traction transformer—medium voltage prototype[J]. IEEE Transaction on Industrial Electronics, 2014, 61(7):3257-3268.
- [15] Jonas E, Julian Böhler, Daniel Rothmund. Analysis and cell-level experimental verification of a 25 kW all-SiC isolated front end 6.6 kV/400 V AC-DC solid-state transformer[J]. IEEE Transaction on Power Electronics and Applications,2017, 2(2):140-148.
- [16] Nicolas Hugo, Philippe Stefanutti, Marc Pellerin, Alper Akdag. Power Electronics Traction Transformer[J], European Conference on Power Electronics and Applications, pp.1-10,2007.
- [17] C. Zhao, S. Lewdeni-Schmid, J. Steinke, M. Weiss, and M. Pellerin. Design, implementation and performance of a modular power electronic transformer (PET) for railway application,in Proc. 14th Eur. Conf. Power Electron. Appl., Birmingham, U.K., 2011, pp. 1–10.
- [18] D. Dujic, C. Zhao, A. Mester, J. Steinke, M. Weiss, S. Lewdeni- Schmid,T. Chaudhuri, and P.Stefanutti,—Power electronic traction transformer—Low voltage prototype[J]. IEEE Trans. Power Electron., vol. 28, no. 12,pp. 5522–5534, Dec. 2013.
- [19] 1.Bolla MadhusudanaReddy,Pasala Gopi1,Y.V.Siva Reddy, “Performance improvement of closed loop optimal cascaded high level multilevel inverter fed induction motor drive using ANFIS with low THD and effective speed-torque control” Journal of Electrical Systems, Vol.18, Issue 1, PP.65-81, March 2022.
- [20] 2. S.L.V Sravan Kumar. N. Ravi Shankar Reddy,M. Vijay Kumar “Quasi Switched Capacitor based Integrated Boost Series Parallel Fly-Back Converter for Energy Storage Applications” Journal of scientific and industrial research, Vol.78, pp.711-715, July 2019
- [21] 3. S.Sarada, N.Ravi sankara Reddy, C.Ganesh, “Reduction of Common Mode Voltage for 3-level Inverter fed DTC of Open End Winding Induction Motor Drive” Test Engineering and Management, Vol.82, Page No. 8754 – 6345 January-February 2020
- [22] 4. S. Nithya Lavanya, T. Bramhananda Reddy, M. Vijay Kumar “Vector Control of Induction Motor with Variable Sampling Frequency Random PWM Techniques for Reduced Harmonic Distortion” Test Engineering and Management, Volume 82,Page No. 14688 – 14694,January - February 2020
- [23] 5.S.Sarada, Dr.N.Ravi sankara Reddy, “A scalar based SVPWM and DPWM techniques for 3-level inverter fed DTC of open end winding induction motor drive” Jour of Adv research in Dynamical & Control Systems, Volume-10, Issue-13, pp.2553-2568, Sep. 2018.